


## Brochure Plan

scale 1:110

☐ JR Design & Drafting	Issue A	Amendment	Date:	North:		Proposed:	Drawing Title:	Revision:
Residential Design & Drafting Services	A C	Concept Plans	30.06.21	-		New Double Storey Dwelling	Brochure Plan	A
Phone: (02) 9757 - 4002 Fax: (02) 9757 - 4003 Email: jr.design.draftling@gmail.com Address: Suite 304 No. 447 Victoria Street, Wetherill Park. NSW 2164				]		Location:		Design: BOLTON 51
(Lancet Stoke:  1. All work to be carried out in accordance with the requirements of the Building Code of Australia and the relevant local authority.  2. All whole framing to be carried out to the support, and continued beams including supports to Grigner's and Continued Building Stoke (Stoke) as a minimum.  3. All enforced concrete, see the beams including supports, and continued beams including supports to Grigner's				]	VOGUÉ/HOMES			VH Job No: TBC
details.  4. Structural Engineer to check, detail and confly brickwork to garage area with a height greater than 3000mm between horizontal supports.  5. All brickwork to be constructed in accordance with the requirements of the Bullding Code of Australia.  6. Control joints in incikwork to be provided in accordance with the requirements of the Bullding Code of Australia.  7. Donover openinous with invance dozening does to room containing bullets with an ecloser than 100mm to the bullet.				]	Copyright:  This plan is the exclusive property of Vogue Homes. and must not be used, reproduced or copied wholly in any way without	Client:	Cools	JR Job No:
<ol> <li>Doorway openings with inward opening doors to room containing toxers which are closer than 1,20umm to the toket, are to be fitted with hinges to allow the door to be removed from the outside when the door is closed.</li> </ol>					permission	Vogue Homes	1:115 Sheet 1 of 1	VH0000

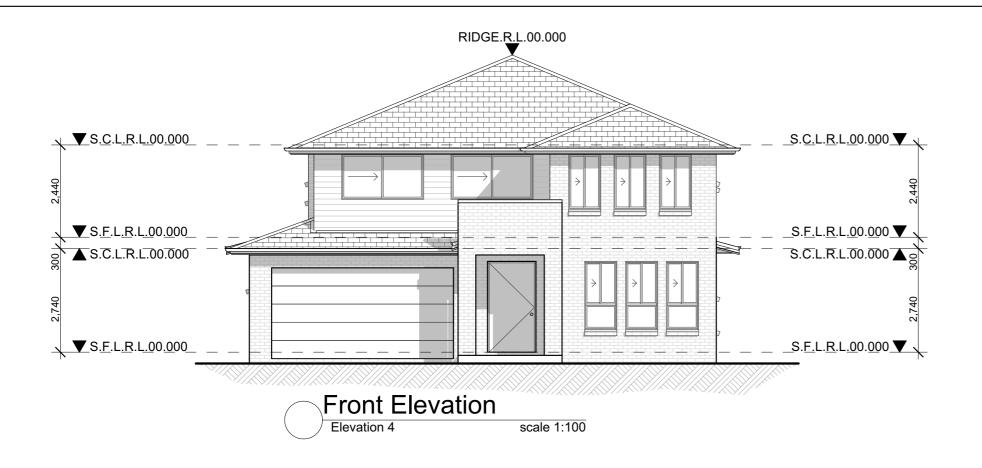

Elevation 1

## **CONSTRUCTION NOTES:**

- Figured dimensions are to be taken in preference to scaling
   No allowance has been made for shrinkage or milling
   All Levels shown are approximate and should be verified on site during construction.
- Doorway openings with inward opening doors to room containing toilets which are closer than
   1200mm to the toilet are to be
   fitted with hinges to allow the door to be removed from the outside when the door is
- nitted with hinges to allow the door to be removed from the outside when the door is closed.

  5. Dimensions are to be verified on site by builder before the commencement of work

  6. All timber framing to be carried out to the requirements of Australian Standards (as 1684) as a minimum.
- 7. Refer to the builders scope of works for inclusions & exclusions
  8. All work to be carried out in accordance with the requirements of the Building Code of Australia
- and the relevant local authority.

  All service positions, air conditioning droppers, outlets, return air grills, manholes and bulkhe to be determined on site at supervisor / contractors discretion

  10. All reinforced concrete, steel beams including supports, and nominated beams including supports to Engineer's details.

  11. Termite protection in accordance with Australian Standards
- Refer to Basix Certificate for energy, water & thermal requirements

  14. All 1st floor windows with a sill height less than 1700mm to have a max opening width of 125mm
   15. Final Construction Joints, steel posts & Beams, Floor Joist to structural engineer
  - plans


    16. Meter Box, Gas Meter to be confirmed with Builder on site.

    17. Downpipes to be confirmed with plumber on site.



Issue Amendment Date: North: JR Design & Drafting 30.06.21 Elevations New Double Storey Dwelling Location: BOLTON 51 VH Job No: TBC 30.06.21 JR Job No: This plan is the exclusive property of Vogue Homes. and must not be used, reproduced or copied wholly in any way without permission VH0000 Vogue Homes

scale 1:100

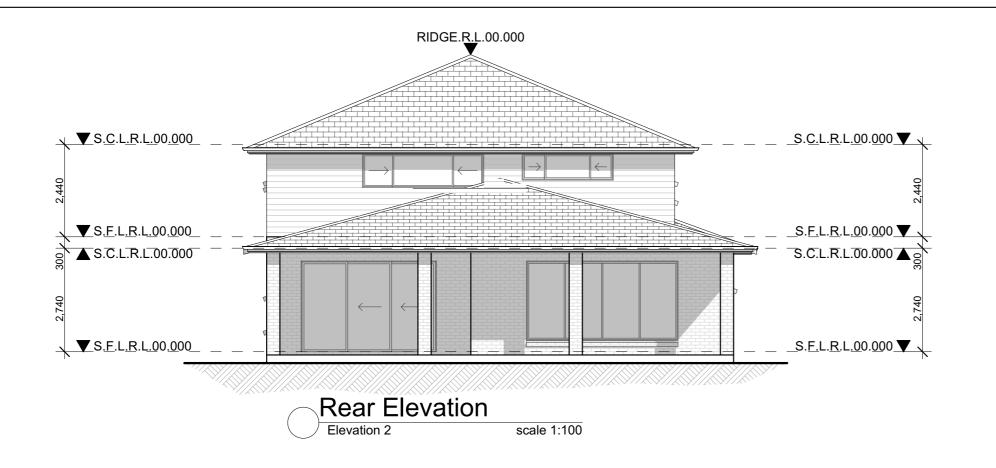

## **CONSTRUCTION NOTES:**

- Figured dimensions are to be taken in preference to scaling
   No allowance has been made for shrinkage or milling
   All Levels shown are approximate and should be verified on site during construction. Doorway openings with inward opening doors to room containing toilets which are closer than
   1200mm to the toilet are to be
   fitted with hinges to allow the door to be removed from the outside when the door is
- nitted with hinges to allow the door to be removed from the outside when the door is closed.

  5. Dimensions are to be verified on site by builder before the commencement of work

  6. All timber framing to be carried out to the requirements of Australian Standards (as 1684) as a minimum.
- 7. Refer to the builders scope of works for inclusions & exclusions
  8. All work to be carried out in accordance with the requirements of the Building Code of Australia
- and the relevant local authority.

  and the relevant local authority.

  All service positions, air conditioning droppers, outlets, return air grills, manholes and bulkhe to be determined on site at supervisor / contractors discretion.

  10. All reinforced concrete, steel beams including supports, and nominated beams including supports to Engineer's details.

  11. Termite protection in accordance with Australian Standards.
- Refer to Basix Certificate for energy, water & thermal requirements

  14. All 1st floor windows with a sill height less than 1700mm to have a max opening width of 125mm
   15. Final Construction Joints, steel posts & Beams, Floor Joist to structural engineer
  - plans

    16. Meter Box, Gas Meter to be confirmed with Builder on site.

    17. Downpipes to be confirmed with plumber on site.

